

1/9




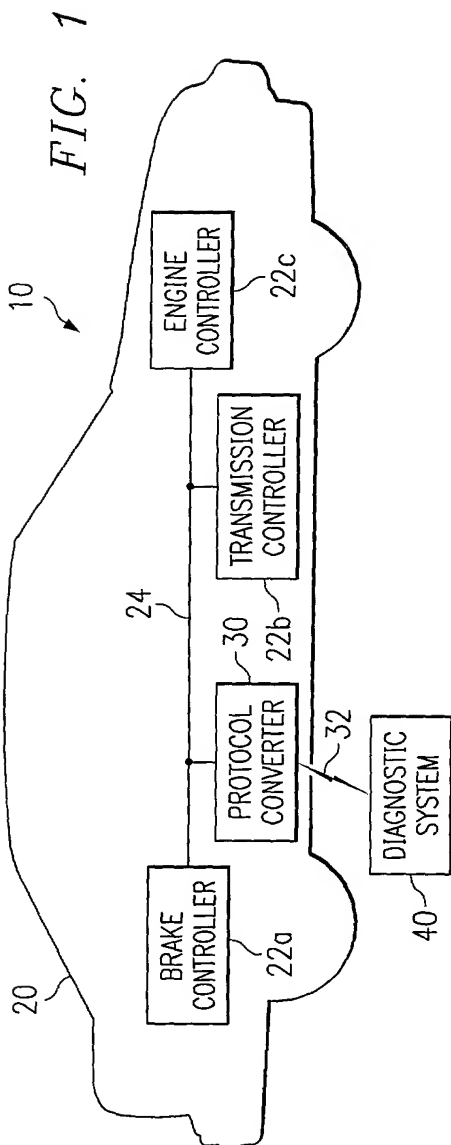


FIG. 2

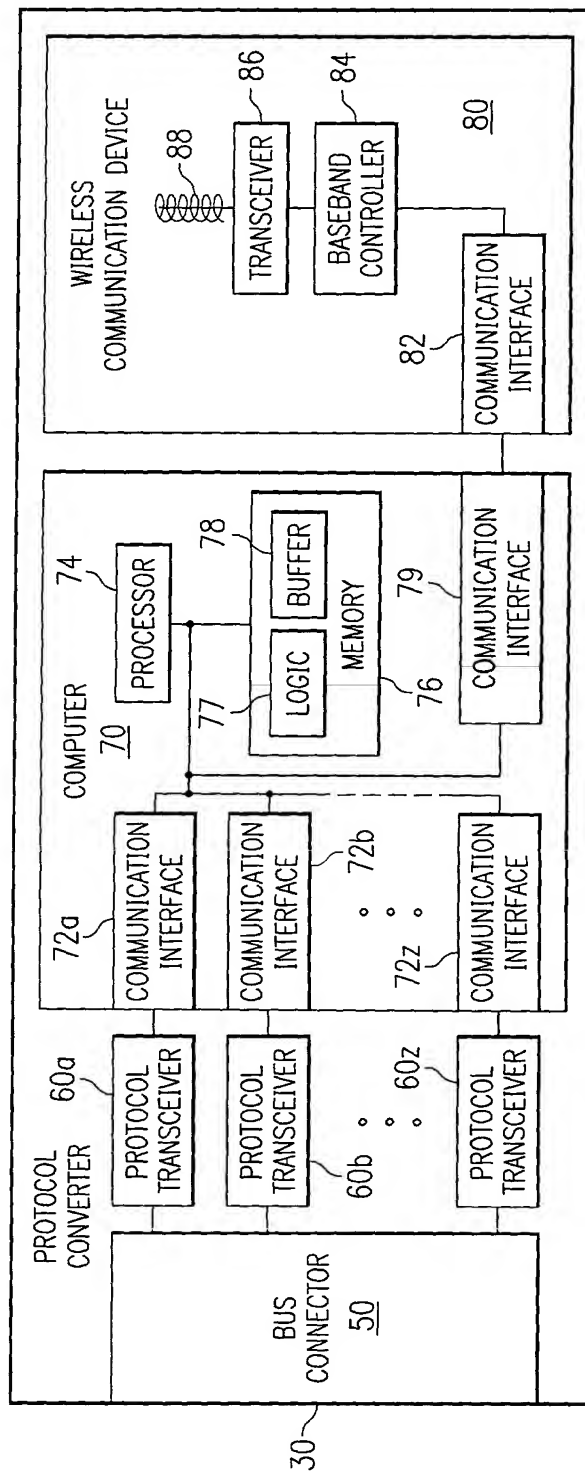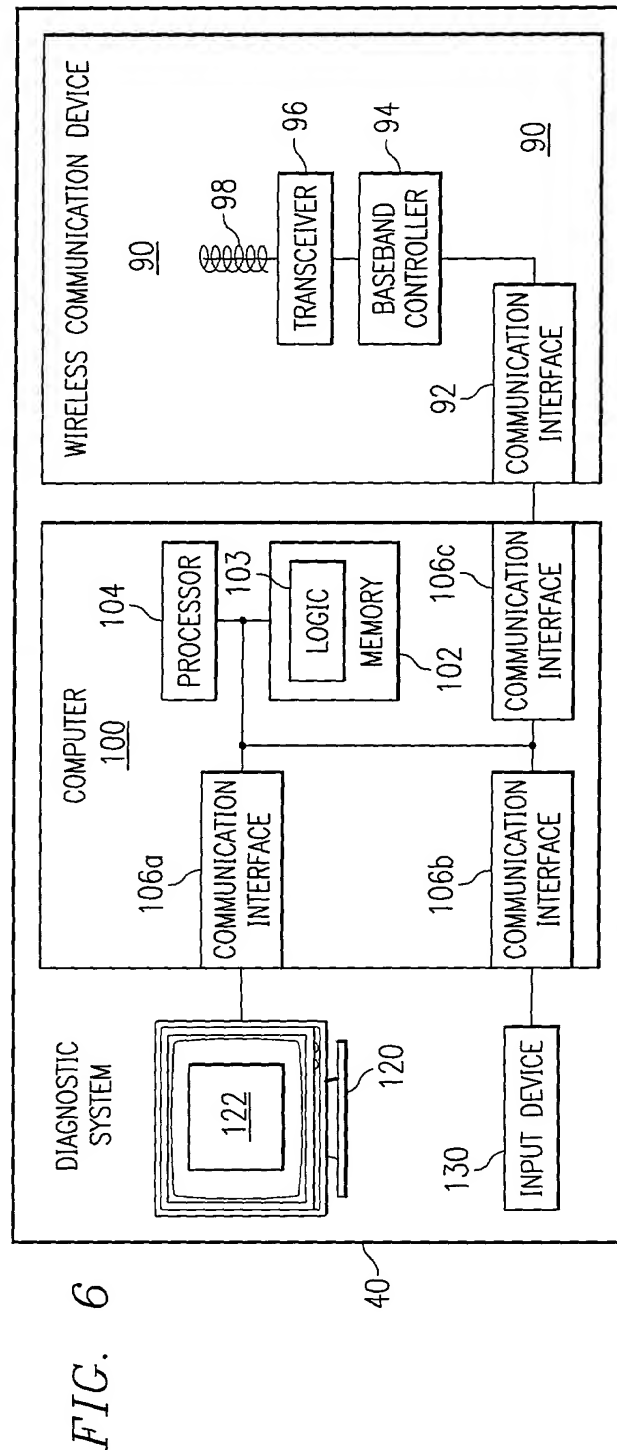

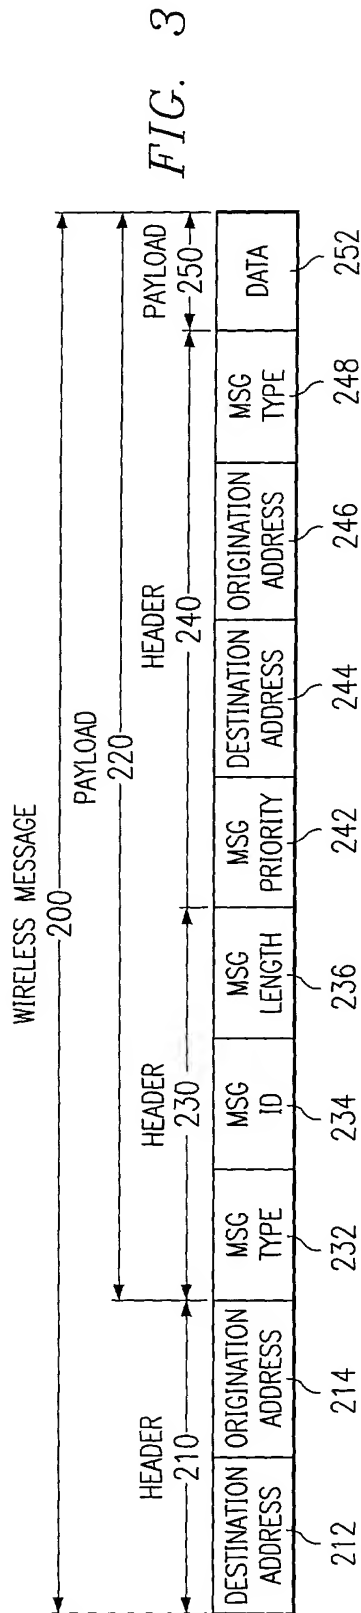

3/9


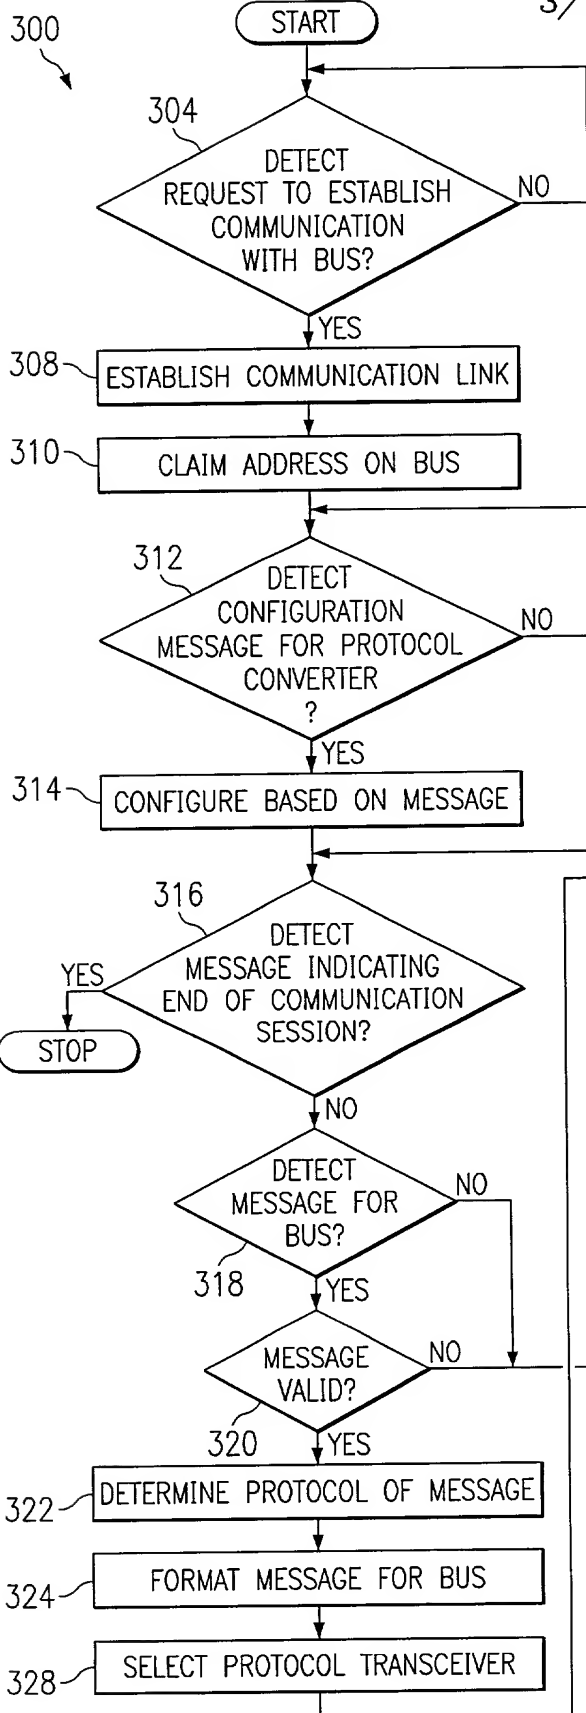


FIG. 4


4/9

FIG. 5A

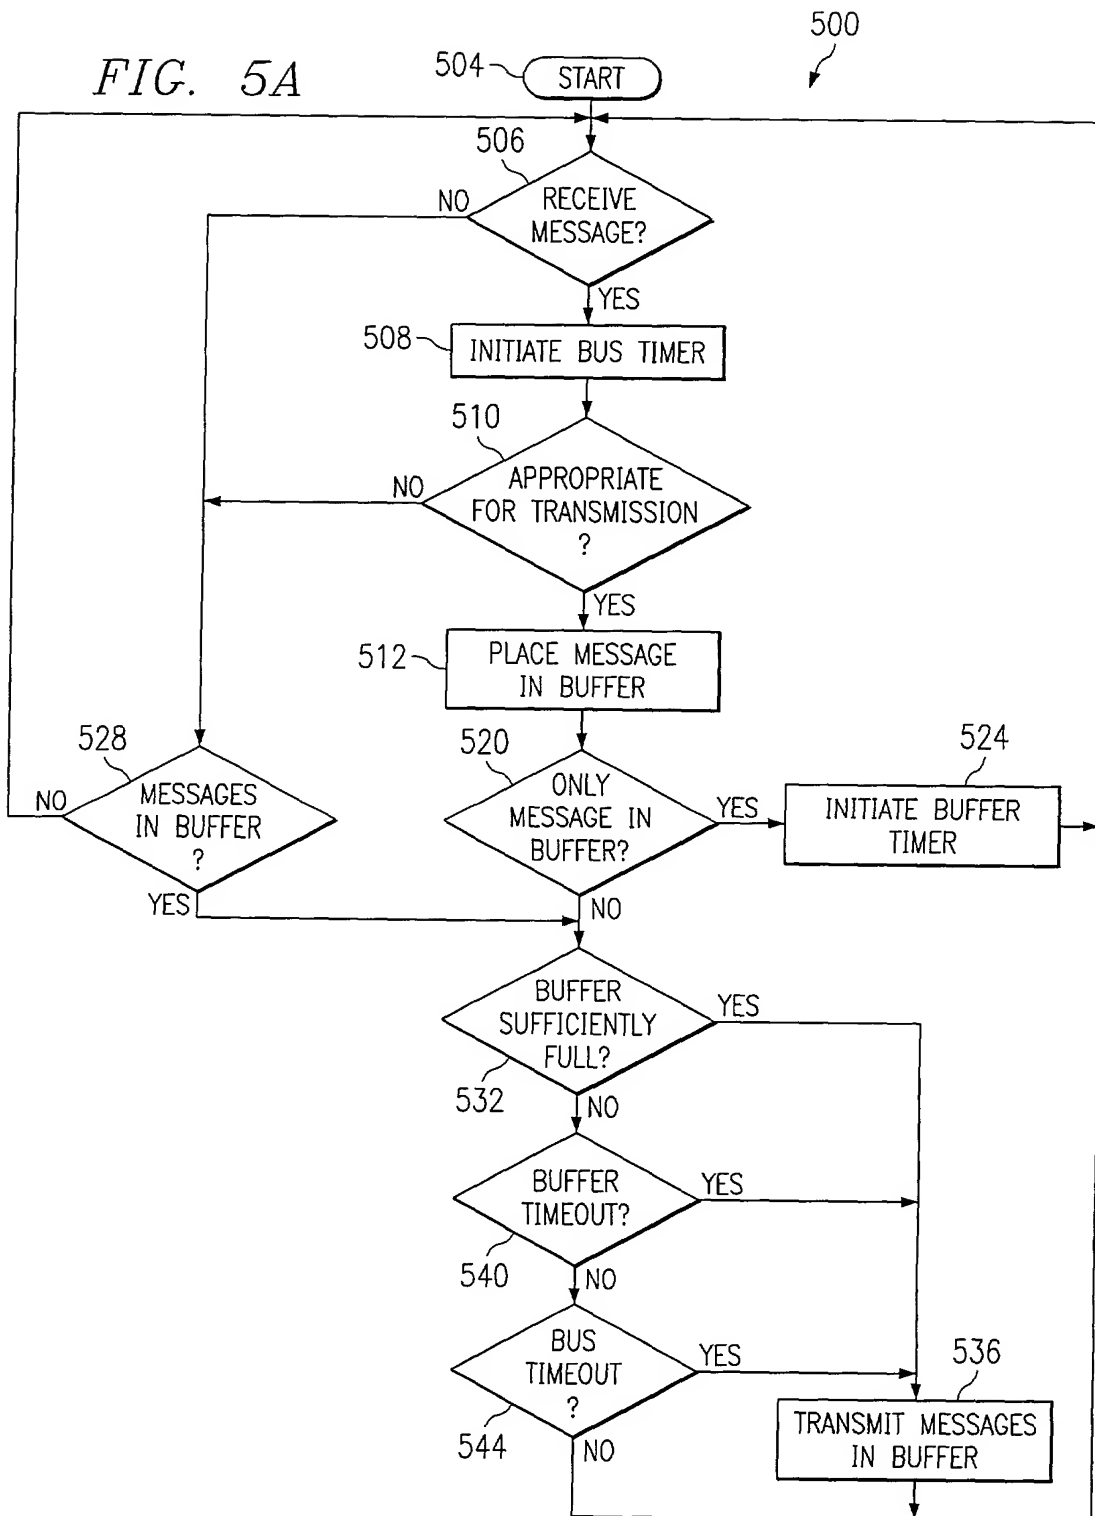

5/9

FIG. 5B

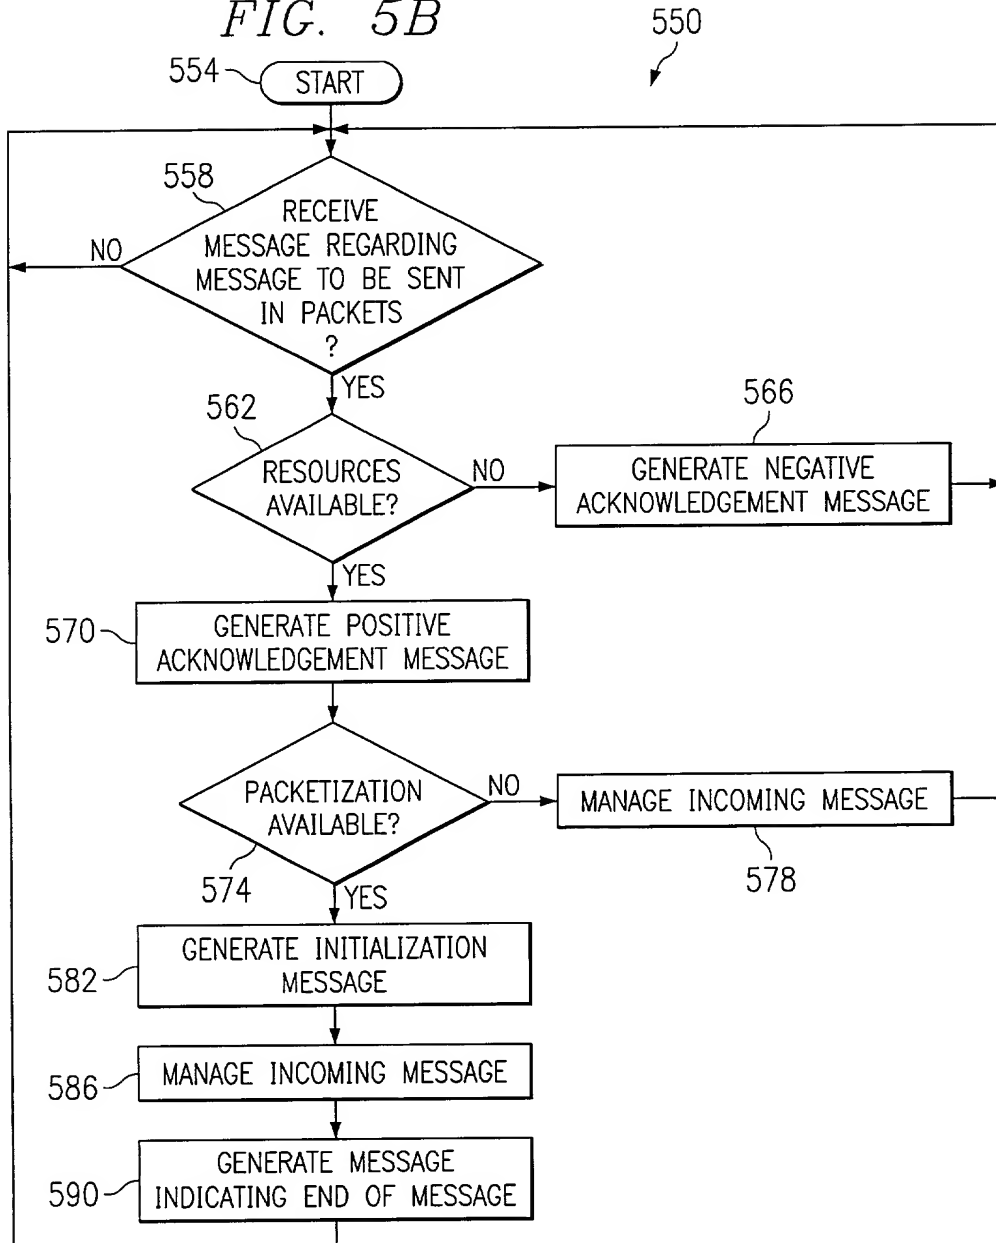

6/9

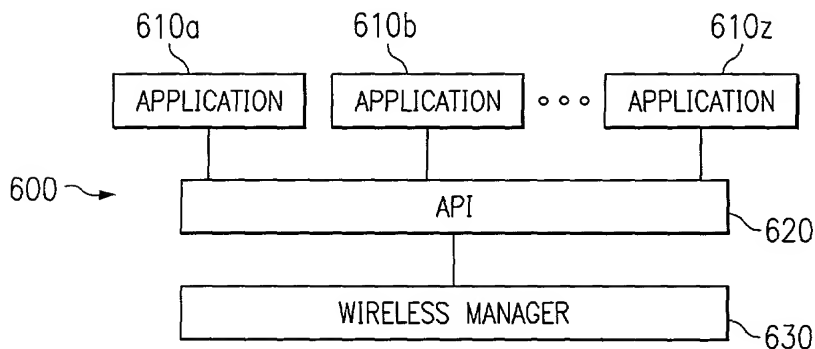


FIG. 7

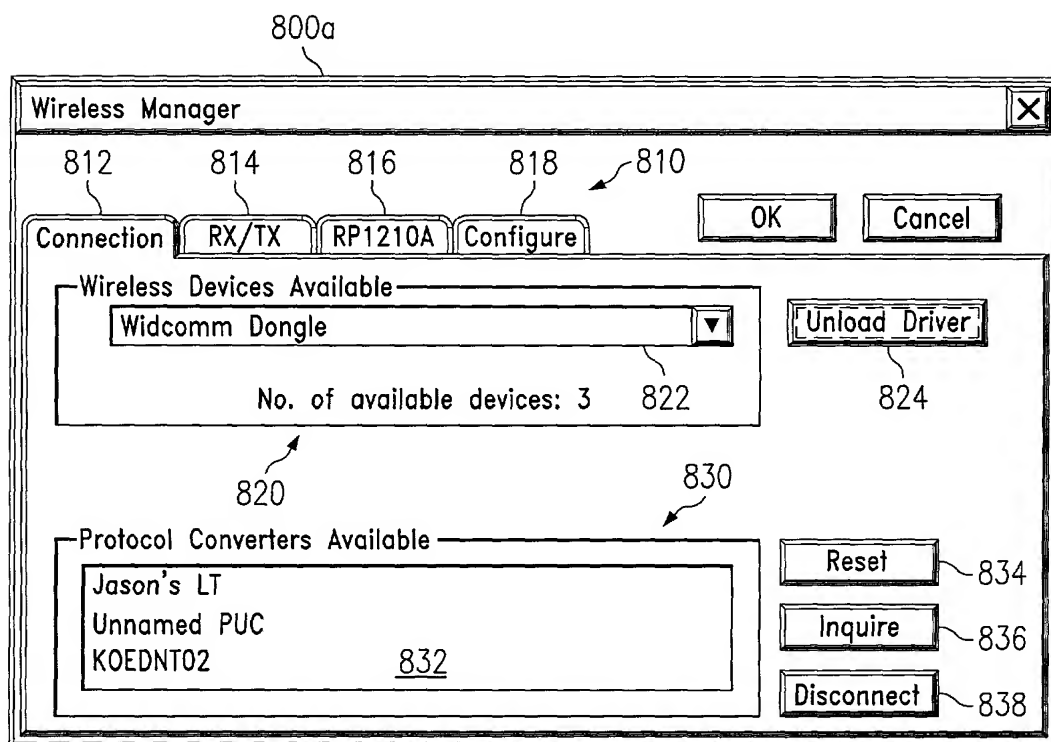


FIG. 8

FIG. 9

800b

Wireless Manager

810

818

Connection RX/TX RP1210A Configure

OK Cancel

Protocol

Start J1708 Start J1939 Start Serial

842 844 846

Secure Advance Config

Open 864 862

860

Diagnostics

Retrieve 854

Power Low
Power High
Signal Strength
Bus Test
LED Test
Gateway Test
RAM Test
ROM Test
BT Hardware

852

Version

Retrieve 876

Settings

☒ Auto Reconnect

874

Remote Name

Set 872

8/9

FIG. 10

800c

Wireless Manager

CAN Bus Timing

Synchronization Jump Width (SJW) (1...4) T_q

Baud Rate Prescaler (BRP) (1...64)

Number of Samples/Bit (0=1 smpl 1=3 smpls)

Time Segment 1 (TSEG1) (1...16) T_q

Time Segment 2 (TSEG2) (1...8) T_q

Obtain Current Default Apply

CAN Filter

18 ef 17 21 Apply

Power Level

Local RSSI

Remote Max Power Level

Remote Cur Power Level

Refresh


Program

Run

OK

9/9

FIG. 11

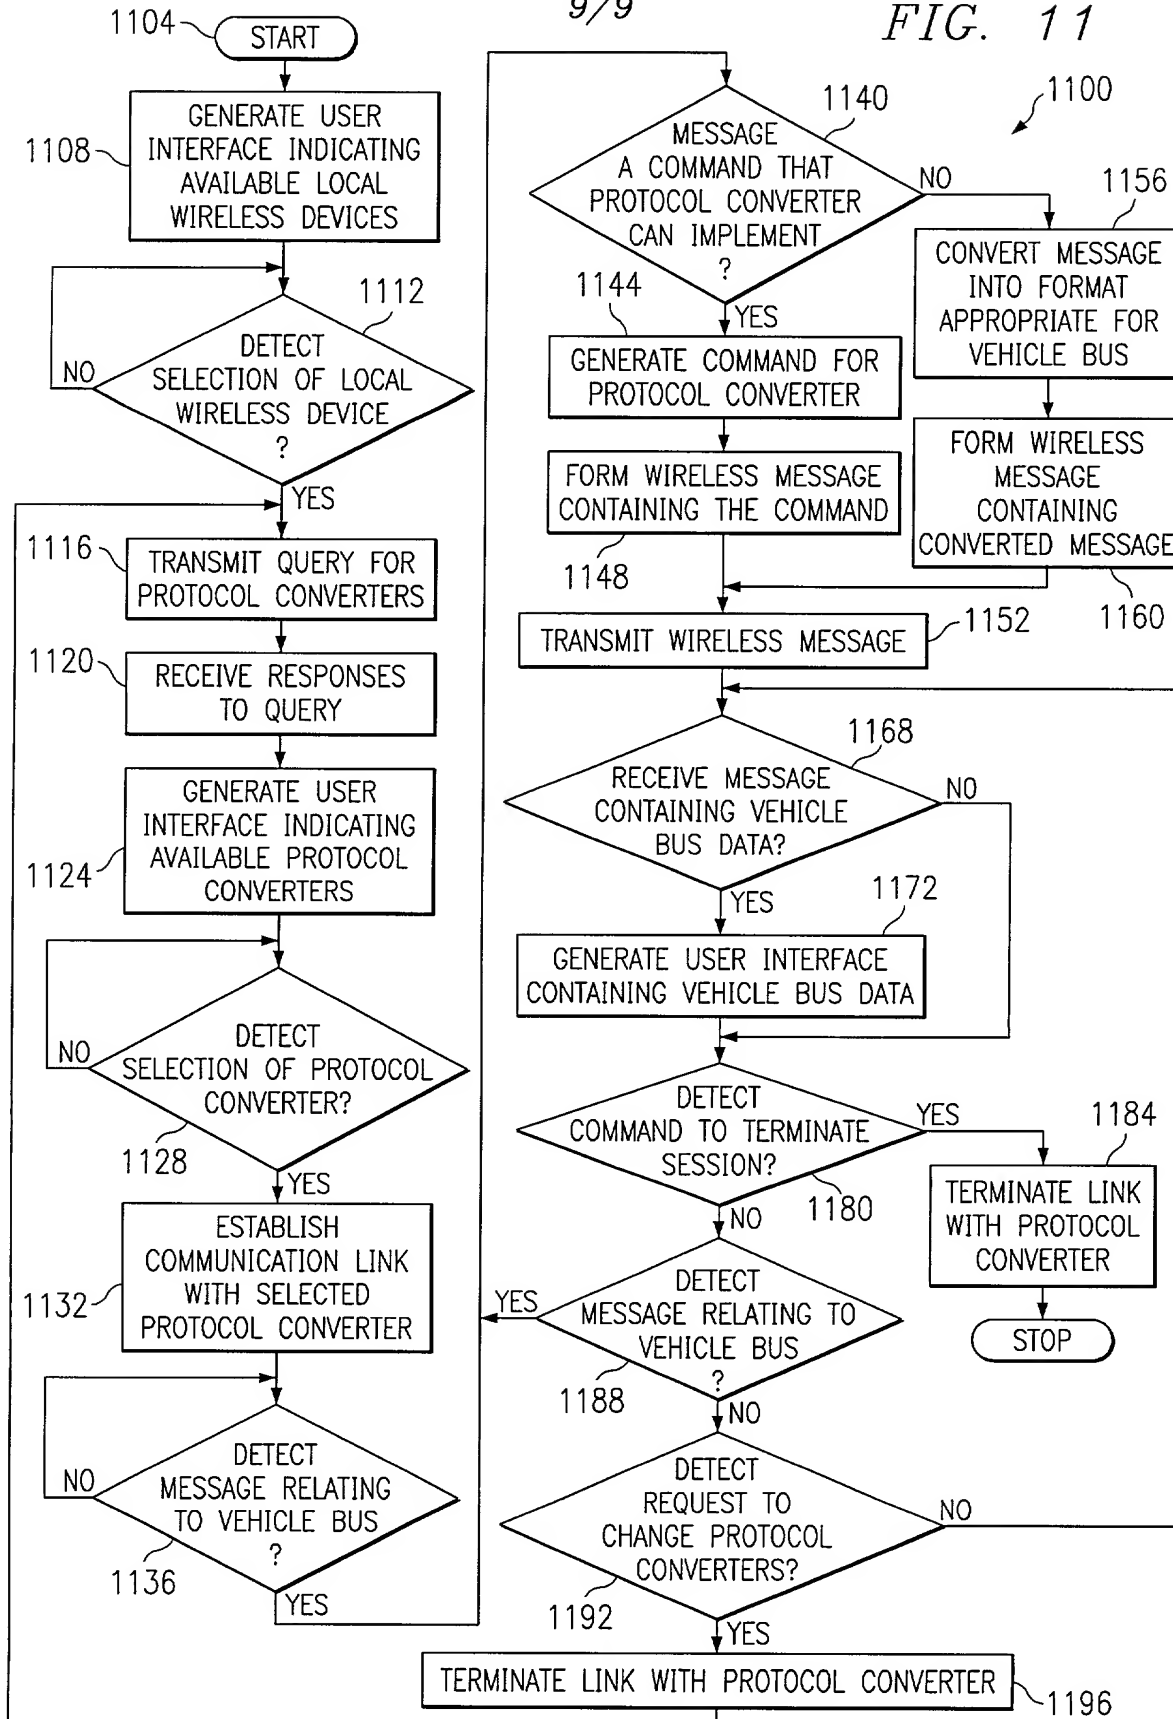

10072121.020802